



**SPECIFICATIONS**

Current Rating:7A AC/DC  
 Voltage Rating:250V AC/DC  
 Withstanding Voltage:1500V AC/Minute  
 Insulation Resistance:1000 Megohms Min.  
 Post:Brass,Tin Plated  
 Wafer:Nylon 66,UL 94V-0

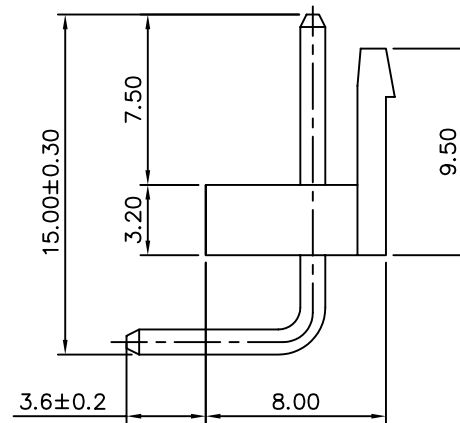

Circuits	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40

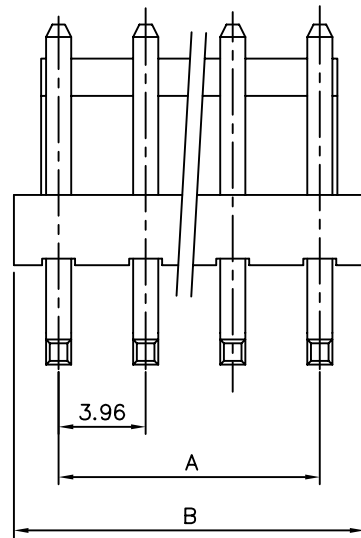

A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.50 .XX ±0.25 .XXX ±0.10				
PART No. VHXXR		CHECKED BY BECKY						
DRAWING No. VHXXR		DRAWING BY HZF						
SCALE	NONE	REV.	A0		UNIT mm		△ A0 NEW RELEASE	BECKY
						NO. REV.	REVISIONS	CHK DATE