
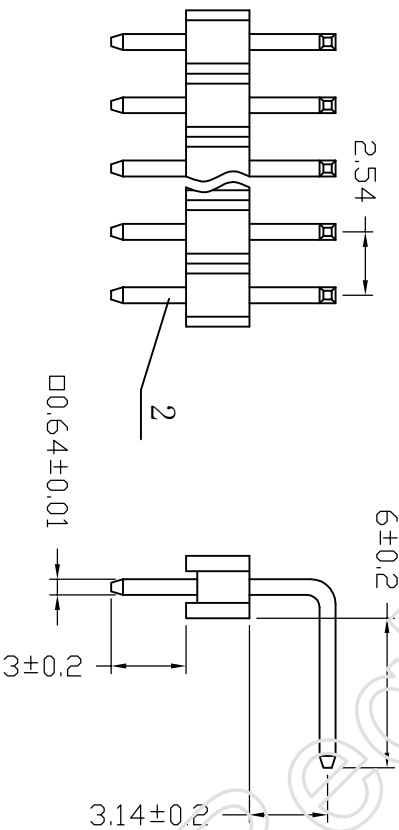


序号/rev/no.	名称/Title	文件编号/File No.
1	塑料件	
2	端子	

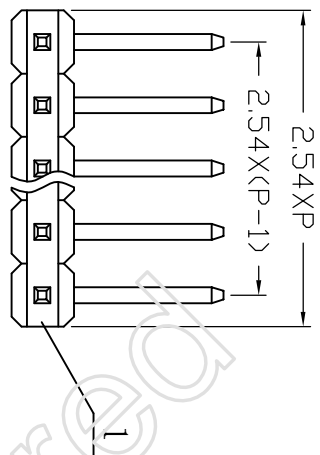

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Current Rating: 1AMP

Dielectric Withstanding Voltage: AC 500V For 1 minute

Operating Temperature: -55°C--+ 105°C

Contact: Brass

Housing: P46/PA6T & 30% Glass Fiber(UL 94V-0)

要求:

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

序号/Rev/No. 更改记录/Revision note 签名/Signature 日期/Date

设计/Designed by	绘图/Drawng by	审核/Checked by	批准/Approved by	备注/Remarks
图名/Title		文件编号/File No.		
112-A-SRM406 15.55mm				
页序/Sheet		单位/Units: mm		
		公差/General Tolerance		
X: ±0.2		X: ±2°		
.X: ±0.1		.X: ±1°		
.xx: ±0.05		.xx: ±0.5°		
.xxx: ±0.01				

新亚电子
XINYA ELECTRONIC CO.,LTD