

# Connector

## Female Header Series




KLS1-208-3.5 2.54 Female Header H3.5mm DIP Type

### Electrical Characteristics:



Current Rating: 3 Amps  
Withstanding Voltage: AC 1000V  
Insulator Resistance: 1000MΩ Min  
Contact Resistance: 20mΩ Max  
Operating Temperature: -45°C~+105°C

### Material:

Insulator Material: Polyester (UL94V-0)  
Standard: PBT  
Contact Material: Brass  
Contact Plating: Flash gold

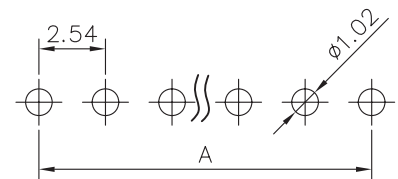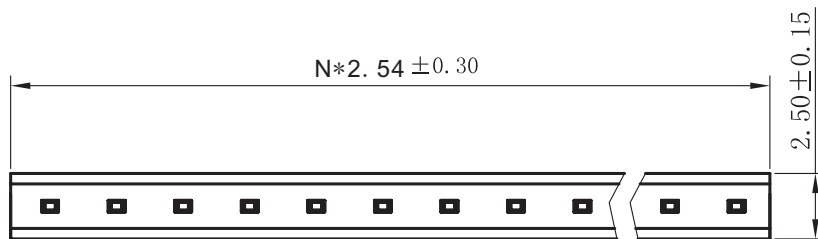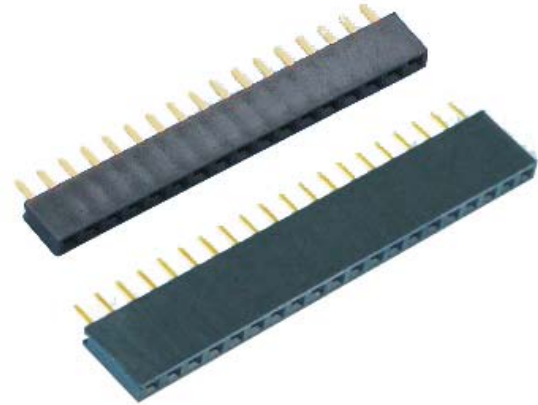


RECOMMEND P. C. BOARD LAYOUT  
PCB TOLERANCE: ±0.05 (TOP VIEW)

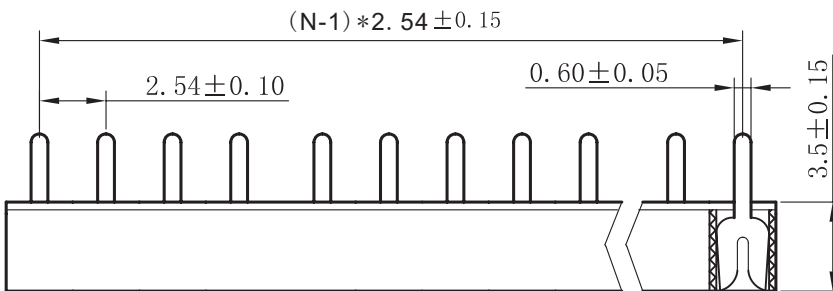

## ORDER INFORMATION

Product NO.: KLS1-208-3.5-1-XX-S

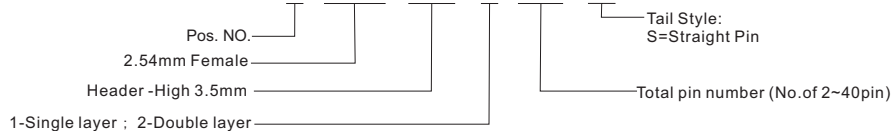

# Connector

## Female Header Series




KLS1-208-3.5 2.54 Female Header H3.5mm DIP Type

### Electrical Characteristics:



Current Rating: 3 Amps  
Withstanding Voltage: AC 1000V  
Insulator Resistance: 1000MΩ Min  
Contact Resistance: 20mΩ Max  
Operating Temperature: -45°C~+105°C

### Material:

Insulator Material: Polyester (UL94V-0)  
Standard: PBT  
Contact Material: Brass  
Contact Plating: Flash gold

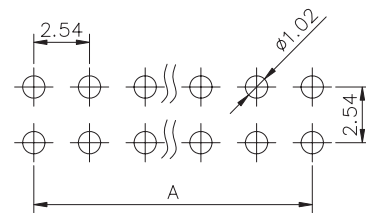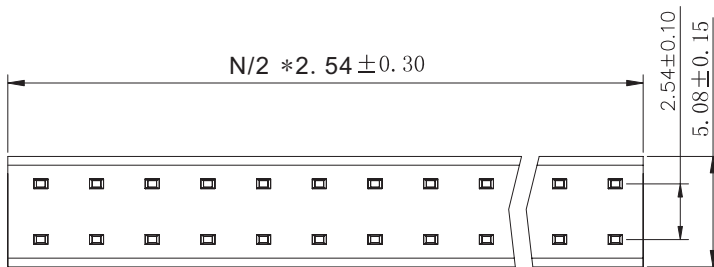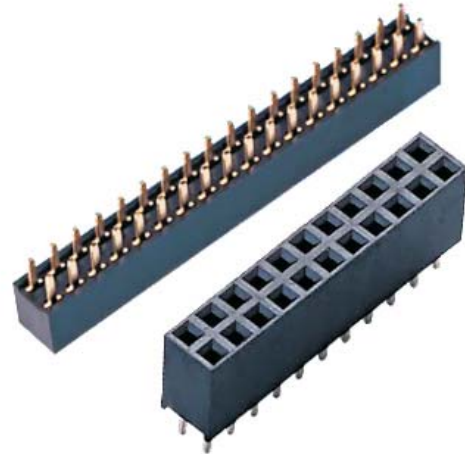

RECOMMEND P. C. BOARD LAYOUT  
PCB TOLERANCE: ±0.05 (TOP VIEW)

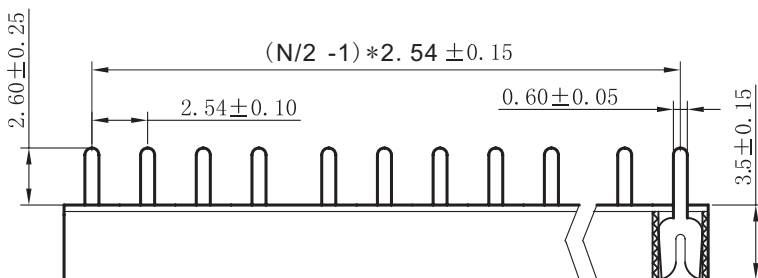

## ORDER INFORMATION

Product NO.: KLS1-208-3.5-2-XX-S

